




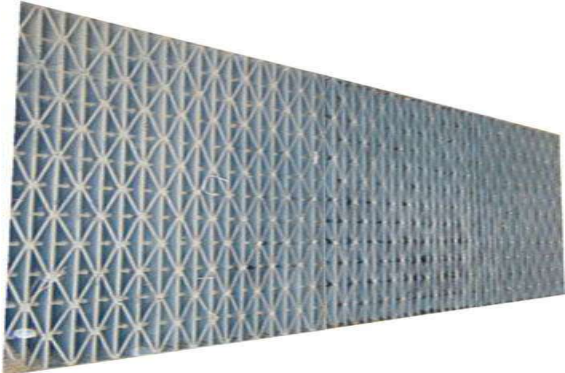
## Компания «Китайско-Российский Красный Мост»


aneway@yandex.ru





+7-913-912-3614

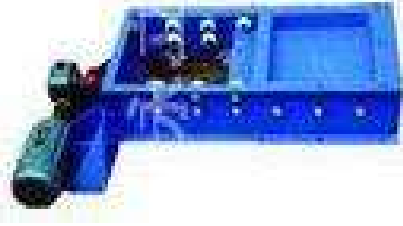


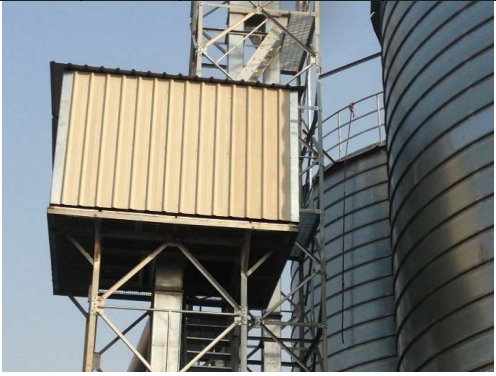
### Price for 8-6250T Spiral Steel Silo



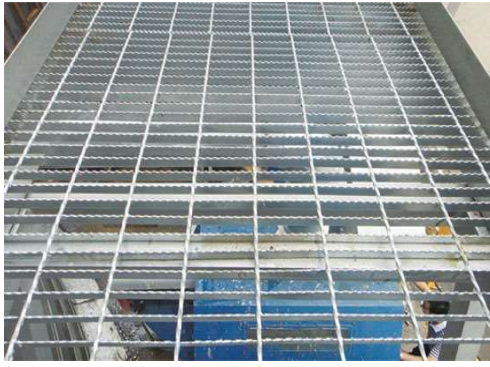
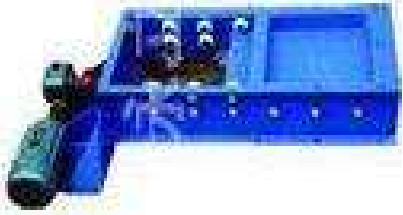
<b>Terms of delivery</b>	
<b>Time of Delivery</b>	The time for Ex-works delivery is 90 days from advance payment and geological data .
<b>Terms of payment</b>	30% paid by T/T as downpayment for order execution in 10 days
	70% paid against shipping documents and acceptance certificate documents byL/C
	a、 65% paid against shipping documents byL/C
	b、 5% paid against acceptance certificate documents byL/C
<b>Validity</b>	Within 30 days

Item	Details	Qty	Power	Price ( USD)	
				Unit Price	Total Price
101	Truck-dumper TQXC100*15	1	45	150000	150000
	1) Maximum lifting weight : 100 T 2) Dimensions : 18M×3M 3) Own weight : 26 T 4) Capacity :45 KW 5)Adjustable inclination:0-45° 6) Lifting Time : 240S 7) Fall Time : 180S				
102	Intake cone4.0m*4.0m	1		3840	3840
	1. Using U-steel for frame 2.it is made of round steel and flat steel. 3.Effectively remove big impurities. 4.Painting				
103	Chain Conveyor HXTGSS50	1	15	18180	18180


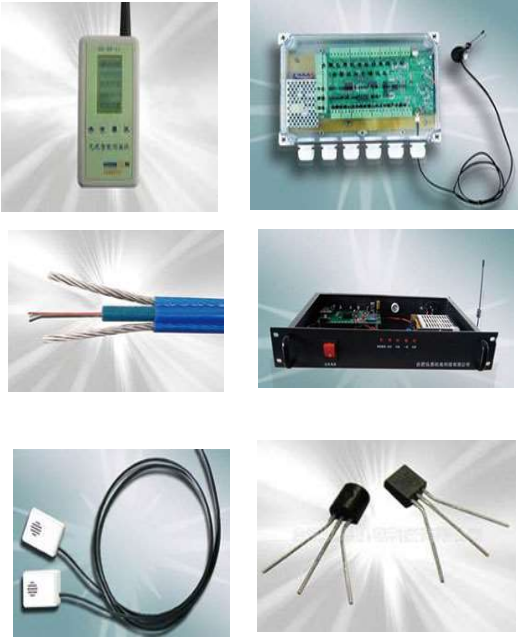

	<p>1.The head and the end of Drag Conveyor:Equipped with alarm device to avoid clogging, and control room warning processing</p> <p>2.All the drag conveyor used nylon scraper, the middle is 45 steel leading rail, the sides are counselling rail structure.</p> <p>3.Main material is produced by hot galvanized steel</p> <p>4. Power:15KW</p> <p>Equipped with Siemens motor and GUOMAO Reducer</p> <p>5. Length: 13M , Capacity: 200T/H</p>				
104	Bucket Elevator HXTDTG80/46	2	44	25200	50400
	<p>1、 Head : Discharge port with explosion-proof and operation of the mouth ;</p> <p>2、 Tail : wear plate tail wheel spokes structure</p> <p>3、 Middle : Both sides are the undercut production; the bucket is nylon bucket made in Zhenjiang sanwei, the belt is Zhenjiang sanwei nylon belt, screw with the election just back teeth mouth screw nut. Belt connector selection type structure.</p> <p>4、 Main material is produced by hot galvanized steel</p> <p>5、 Power:22KW Equipped with Siemens motor and GUOMAO Reducer</p> <p>6、 Height: 18m, Capacity: 200T/H</p>				
105	Tic-Tac Frame 3.0m*3.0m	1		8400	8400
	<p>1、 Type of Connection : Welded at site ;</p> <p>2、 Frame : Tread plate</p> <p>3、 Main material is produced by hot galvanized steel ;</p> <p>4、 Function : Used to install and fix bucket elevator safety ;</p> <p>5、 Height:13m。</p>				
106	Awning 3.6m*3.6m	1		2040	2040




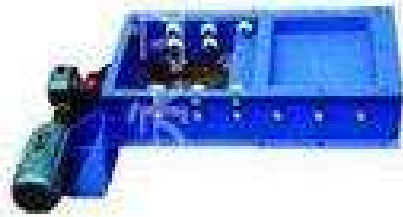
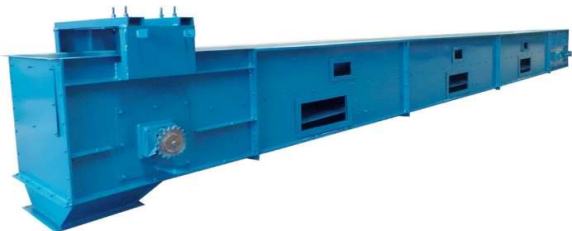
	<p>1、 Structure : The skeleton is produced by 12/Q235 channel steel and L75*6 angle steel.It is covered by 0.5mm steel ;</p> <p>2、 Function : Protect the head of elevator form raining 。</p>				
107	Pre-cleanerHXTCQW150	1	6	22000	22000
	<p>1. to remove big impurities, such as straw, wheat straw, hemp rope, and corn leaves and cobs, as well as fine impurities, such as gravel and soil particles.</p> <p>2. air blower will do second cleaning to remove light impurities.</p> <p>3、 Power: 3KW Equipped with Equipped with SIEMENS motor, GUOMAO Reducer ;</p> <p>4、 Capacity: 200T/H</p>				
108	MagnetHXTCXT50	1		5500	5500
	<p>1、 Use to move iron。</p> <p>2、 Capacity : 200/H</p>				
109	Chain Conveyor HXTGSS50	1	11	13000	13000
	<p>1.The head and the end of Drag Conveyor:Equipped with alarm device to avoid clogging, and control room warning processing</p> <p>2.All the drag conveyor used nylon scraper, the middle is 45 steel leading rail, the sides are counselling rail structure.</p> <p>3.Main material is produced by hot galvanized steel</p> <p>4. Power:11KW Equipped withSiemens motor and GUOMAO Reducer</p> <p>5. Length: 10M , Capacity: 200T/H</p>				
110	Electric Valve	1	0,37	1000	1000

	<p>1.Type : : HXDZ50  2.Main material : hot galvanized steel  3.Capacity:200T/H</p>				
201	Bucket Elevator HXTDTG80/46	1	45	43600	43600
	<p>1、 Head : Discharge port with explosion-proof and operation of the mouth ;  2、 Tail : wear plate tail wheel spokes structure  3、 Middle : Both sides are the undercut production; the bucket is nylon bucket made in Zhenjiang sanwei, the belt is Zhenjiang sanwei nylon belt, screw with the election just back teeth mouth screw nut. Belt connector selection type structure.  4、 Main material is produced by hot galvanized steel  5、 Power:45KW Equipped withSiemens motor and GUOMAO Reducer  6、 Height: 37m, Capacity: 200T/H</p>				
202	Tic-Tac Frame 3.0m*3.0m	1		18000	18000
	<p>1、 Type of Connection : Welded at site ;  2、 Frame : Tread plate  3、 Main material is produced by hot galvanized steel ;  4、 Function : Used to install and fix bucket elevator safety ;  5、 Height:28m。</p>				
203	Awning 3.6m*3.6m	2		2050	4100
	<p>1、 Structure : The skeleton is produced by 12/Q235 channel steel and L75*6 angle steel.It is covered by 0.5mm steel ;  2、 Function : Protect the head of elevator form raining 。</p>				
204	Chain Conveyor HXTGSS50	1	48	3900	3900

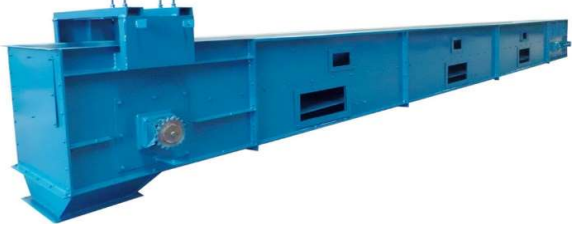



	<p>1.The head and the end of Drag Conveyor:Equipped with alarm device to avoid clogging, and control room warning processing</p> <p>2.All the drag conveyor used nylon scraper, the middle is 45 steel leading rail, the sides are counselling rail structure.</p> <p>3.Main material is produced by hot galvanized steel</p> <p>4. Power:37KW</p> <p>Equipped withSiemens motor and GUOMAO Reducer</p> <p>5. Length: 48M , Capacity: 200T/H</p>				
205	Chain Conveyor HXTGSS50	1	37	36700	36700
	<p>1.The head and the end of Drag Conveyor:Equipped with alarm device to avoid clogging, and control room warning processing</p> <p>2.All the drag conveyor used nylon scraper, the middle is 45 steel leading rail, the sides are counselling rail structure.</p> <p>3.Main material is produced by hot galvanized steel</p> <p>4. Power:37KW</p> <p>Equipped withSiemens motor and GUOMAO Reducer</p> <p>5. Length: 42M , Capacity: 200T/H</p>				
206	Trestle 1.6m*1.2m	1		32500	32500
	<p>1、 Structure : [12 u-steel, L8 angle ;</p> <p>2、 Type of connection : Welded ;</p> <p>3、 Material : Hot galvanzied steel ;</p> <p>4、 Length :88m</p>				
207	Electric Valve	3	0,37	1000	3000
	<p>1.Type : : HXDZ50</p> <p>2.Main material : hot galvanized steel</p> <p>3.Capacity:200T/H</p>				





208	Chain Conveyor HXTGSS50	4	88	26500	106000
	<p>1.The head and the end of Drag Conveyor:Equipped with alarm device to avoid clogging, and control room warning processing</p> <p>2.All the drag conveyor used nylon scraper, the middle is 45 steel leading rail, the sides are counselling rail structure.</p> <p>3.Main material is produced by hot galvanized steel</p> <p>4. Power:22KW</p> <p>Equipped withSiemens motor and GUOMAO Reducer</p> <p>5. Length: 27M , Capacity: 200T/H</p>				
209	Trestle 1.6m*1.2m	4		1100	4400
	<p>1、 Structure : [12 u-steel, L8 angle ;</p> <p>2、 Type of connection : Welded ;</p> <p>3、 Material : Hot galvanized steel ;</p> <p>4、 Length :28m</p>				
210	Electric Valve	4	0,37	1000	4000
	<p>1.Type : : HXDZ50</p> <p>2.Main material : hot galvanized steel</p> <p>3.Capacity:200T/H</p>				
211	Lever Sensor	16		250	4000
	<p>1、 Type : mechanical</p> <p>2、 two each silo</p>				
212	Silo Φ23m * H20m	8		141500	1132000




Roof	The 1.2 mm thick silo roof is produced by high quality double-sided galvanized steel , and quantity exceed double-size galvanized 275 g/m2				
Body	The rolling plate is produced by Hebei Handan Iron and Steel Co., Ltd., which is the high quality double-sized galvanized steel plate with 350 g/m2 (SGH340).The thickness of plate is 5m 2.5mm, 4m3.0mm, 4m3.5mm, 7m4.0mm 。				
Ribs	The stiffener are produced by Magang (Group) Holding Co., Ltd or Jinan iron and steel company ltd. Rib A 8rows 20m 【16# others 64rows : 3m 【16# 3m 【14#, 3m 【12#, 6m 【10#, 5m 【8#				
	The fence are made by 33inch round steel,and the height is 1.2m.The access door is 600mm*600mm				
213	Temperature measurement system	8		6800	54400
	7 digital temperature measurement cable (American DALLAS sensor)each silo, each measurement on WenZhu every 2 meters a temperature sensing point, temperature measurement cable with nylon or PE sheathed protection, the seal and anti-static; Cable insulation has good flexibility, in testing temperature range don't happen fault; In the cable through the silo at the top of the entrance mobile corrosion resistant plate installation or seal, all-weather rainproof and air.				
	Temperature-measuring Range: -55°C-+125°C Accuracy: ±0.5°C Resolution: 0.1°C				
	5V DC switching power , standby external 5V adapter power supply interface Protection degree: IP6				
214	Sweep Auger	8	120	34800	278400
	Type:Morillon SCJ32 Power: 15KW By buyer				




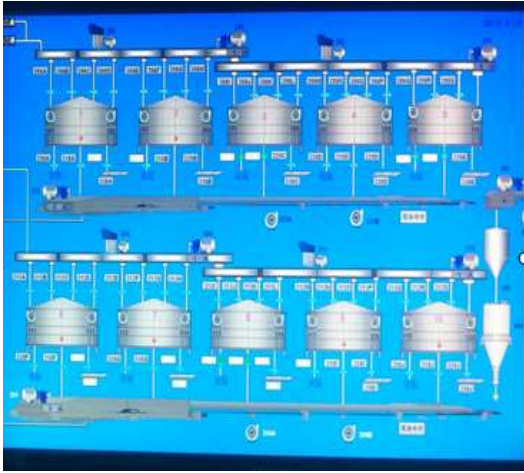
215	Steel Cone Φ2.0m	40		800	32000
	1、4mm hot galvanized steel				
216	ventilation system	8	600	10000	80000
	Positions within the material can effectively reduce the temperature, ventilation panels of high quality disposable 1.2mm galvanized sheet metal forming, there is a safety net, so that five defense, to 24 hours of continuous work. 30kw each				
217	Manual Valve	40		600	24000
	1.Type : : HXSZ50 2.Main material : hot galvanized steel 3.Capacity:200T/H				
218	Electric Valve	8	0,37	1000	8000
	1.Type : : HXDZ50 2.Main material : hot galvanized steel 3.Capacity:200T/H				
219	Belt Conveyor HXTDSQ80	4	60	28500	114000
	1.Main material is produced by hot galvanized steel 2. Power:7.5KW Equipped withSiemens motor and GUOMAO Reducer 3. Length: 35M , Capacity:200T/H				



220	Belt Conveyor HXTDSQ80	1	44	82000	82000
	<p>1.Main material is produced by hot galvanized steel</p> <p>2. Power:22KW</p> <p>Equipped withSiemens motor and GUOMAO Reducer</p> <p>3. Length: 100M , Capacity:200T/H</p>				
221	Electric two-way Slider	1	0,37	1000	1000
	<p>1.Type : : HXFFDZZ50/45</p> <p>2.Main material : hot galvanized steel</p> <p>3.Capacity:200T/H</p>				
222	Belt Conveyor HXTDSQ80	1	5,5	18050	18050
	<p>1.Main material is produced by hot galvanized steel</p> <p>2. Power:5.5KW</p> <p>Equipped withSiemens motor and GUOMAO Reducer</p> <p>3. Length: 22M , Capacity:200T/H</p>				
301	Bucket Elevator HXTDTG80/46	1	22	25000	25000
	<p>1、 Head : Discharge port with explosion-proof and operation of the mouth ;</p> <p>2、 Tail : wear plate tail wheel spokes structure</p> <p>3、 Middle : Both sides are the undercut production; the bucket is nylon bucket made in Zhenjiang sanwei, the belt is Zhenjiang sanwei nylon belt, screw with the election just back teeth mouth screw nut. Belt connector selection type structure.</p> <p>4、 Main material is produced by hot galvanized steel</p> <p>5、 Power:22KW Equipped withSiemens motor and GUOMAO Reducer</p> <p>6、 Height: 17m, Capacity: 200T/H</p>				

302	Tic-Tac Frame 3m*3m	1		7750	7750
	<p>1、 Type of Connection : Welded at site ;</p> <p>2、 Frame : Tread plate</p> <p>3、 Main material is produced by hot galvanized steel ;</p> <p>4、 Function : Used to install and fix bucket elevator safety ;</p> <p>5、 Height:12m。</p>				
303	Awning 3.6m*3.6m	1		2050	2050
	<p>1、 Structure : The skeleton is produced by 12/Q235 channel steel and L75*6 angle steel.It is covered by 0.5mm steel ;</p> <p>2、 Function : Protect the head of elevator form raining 。</p>				
401	Fan :	1	18,5	2500	2500
	<p>1.Type:4-72NO6C</p> <p>2.Power:18.5KW ;</p>				
402	Pulse Dust Collector	1		9200	9200
	1.Type : HXTBLMD104				
403	Airlock device	1		700	700

	1.Type:HXTFGFY9 2.Power:0.75KW				
404	Cyclone	1		2400	2400
	1.φ1000				
405	Airlock device	1		650	650
	1.Type:HXTFGFY9 2.Power:0.75KW				
406	Fan :	1	7,5	900	900
	1.Type:4-72NO4.5A 2.Power:7.5KW ;				
407	Pulse Dust Collector	1		9000	9000
	1.Type : HXTBLMD52				
408	Airlock device	1		600	600

	1.Type:HXTFGFY7 2.Power:0.75KW			
409	Cyclone	1	2000	2000
	1.φ800			
410	Airlock device	1	600	600
	1.Type:HXTFGFY7 2.Power:0.75KW			
501	Control System	1	173300	173300
	MCC Control Center (imported PVC model screen, , the main components used Schneider products); Shangshang Cable			
	wire case is made of hot galvanized steel			
	Charging and discharging control is separated			
一、 Total price above				2595060
二、 material at site				
1	quipment rack, equipment maintenance platform ;			26000
2	Standard parts, seals parts and other auxiliary materials ;			15000
3	Paint。			

三、 Installing supervision fee( 80USD/PERSON*DAY for Supervisor, we provide 5 supervisor to help install silo within 100 days with 2 sets of installing tools,4 supervisor for equipment within 60 days and 2 supervisor for control system within30 days.the buyer will provide 20 person.The buyer should bear the round-trip tickets,food and hotel for seller's engineer.)	76800
四、 The expenditure for the inspection group	13000
五、 Design fee	Free
六、 Delivery fee( Factory to ShangHai ) need about 65 units of 40ft containers, with 2 sets of installing tools	82750
FOB(SHANGHAI PORT)	2808610
Note: Civil work is not included in this price list.	